




IK08 SLED

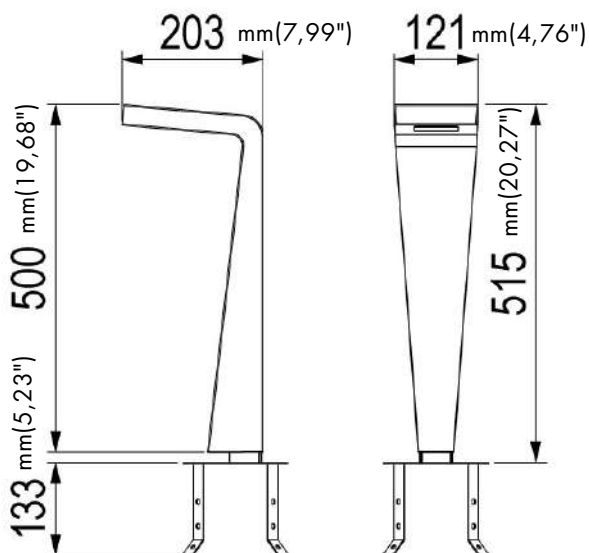

## GENERAL:

Item code:	3001-GR-C23A or 3001-GR-C24A(see sources)
Place installation:	outdoor
Note:	The product includes counter plate with stay bolts.
Standard colour:	GR- graphite satin finish (similar to RAL 7022)
Variant colour:	CO - Corten
Environments:	urban landscape, hallway, residential lighting

## PHYSICAL:

Installation type:	low pole/bollard
Mounting type:	ground surface
Painting:	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws:	AISI 304 stainless steel screws.
Body:	Housing made of AISI 304 stainless steel brake-formed and fully TIG welded, powder-coated.

## DIMENSIONS:

A: Total width device:	121mm(4,76")
L: Total length device:	203mm(7,99")
H: Total height device:	648mm(25,51")
Height from the ground:	500mm(19,68")
H1: Height hidden built-in:	148mm(5,82")
Weight:	5kg

## OPTICAL SYSTEMS:

Emission:	diffuse
Opening beam:	diffused
Optical System:	SLED optical system with UV resistant PC lenses.

## ENERGY SAVING:

This luminaire contains built-in LED lamps.  
The lamps cannot be changed in the luminaire

## SOURCES:

Source Type:	SLED SQUARE
Power:	6W
Sources Temperature Colour:	3000K CRI>80 for model 3001-GR-C23A 4000K CRI>80 for model 3001-GR-C24A
Output Flux:	508lm for model 3001-GR-C23A 544lm for model 3001-GR-C24A

## ELECTRICAL:

Ballast type	Electronic
Mounting ballast type	Integral
Line input	Use only (EN 60598-1) H07RN-F cable with diameter between 7,5 and 12mm.
Voltage	110-277V
Frequency	50-60Hz