


ALOHA 6

design: Roberto Mantovani

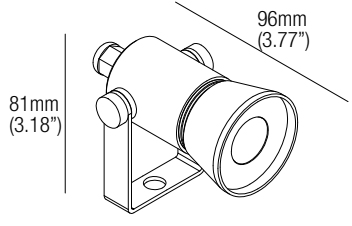

Supply current
 Courant d'alimentation
 Corriente de alimentación
500 mA (V, 8,7V)

Power
 Pouissance
 Potencia
4.5 W

Series wiring
 Câblage en série
 Cableado en serie




CCT/CRI/Flux

CCT	Flux (lm)
2700K	413 lm
3000K	440 lm
3500K	445 lm
4000K	475 lm
Custom	TBD

CRI Typ. 98 R9>90

Photometric diagrams



Code Construction

Construction du code produit
 Construcción del código de producto

XP2 X XX X E

Beam angle
 Angle de faisceau
 Ángulo del haz

S 25° **F** 60°

Color Temperature
 Température couleur
 Temperatura de color

27 2700K **30** 3000K **35** 3500K **40** 4000K **CU** Custom


Finishing
 Finitions
 Acabados

2 Aluminum / Aluminium / Aluminio
5 Black / Noir / Negro
6 Bronze / Bronze / Bronce


Optionals - Accessoires - Accesorios

XP0011

Earth spike
 Piquet de terre
 Pico de la tierra



Base



XP0200
 Aluminum
 Aluminium
 Aluminio

XP0500
 Black
 Noir
 Negro

XP0600
 Bronze
 Bronze
 Bronce

Low luminance louvre
 Filtre basse luminace
 Filtro de baja luminancia



L0032
 Aluminum
 Aluminium
 Aluminio

L0035
 Black
 Noir
 Negro

L0036
 Bronze
 Bronze
 Bronce

Note: cable cut to measure on request
Note: câble sur mesure disponible sur demande
Nota: cable a medida disponible a petición

Drivers

Alimentateurs - Alimentadores

