


BULL 10 PRECISION

design: Lapo Grassellini

90mm (3.54")

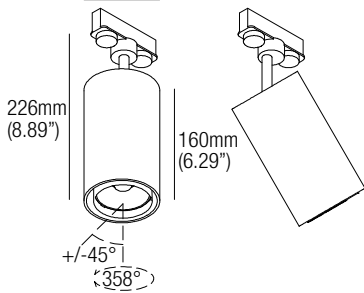

Supply current


Courant d'alimentation
Corriente de alimentación
120 VAC

Power

Pouissance
Potencia
10 W



Photometric diagrams

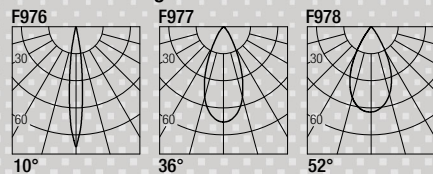

CCT/CRI/Flux

CCT	CRI Typ. 98 / R9>90	Flux (lm)
2700K		860
3000K		912
3500K		949
4000K		985
Dim Warm		TBD



Code Construction

Construction du code produit
Construcción del código de producto

BP1 X XX X X X

No. Circuits — 1 — 2
Nu. Circuits — 1 Circuit — 3 Circuits

Beam angle — S — M — W
Angle de faisceau — 10° — 36° — 52°
Ángulo del haz

CRI — 9
CRI Typ. 98 / R9>90

Color Temperature — 27 — 30 — 35 — 40 — DW
Température couleur — 2700K — 3000K — 3500K — 4000K — Dim Warm
Temperatura de color

Finishing — 1 — 2 — 5
Finitions — White — Grey — Black
Acabados — Blanc — Gris — Noir
Blanco — Blanco — Negro

Optionals

Accessoires
Accesorios

BUX2NA

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



BUX2FL

Adjustable barn door flaps
Volets orientables anti-éblouissement
Aletas direccionales

