




MARUPE 12

design: Roberto Mantovani



Supply current
 Courant d'alimentation
 Corriente de alimentación

500 mA (V_f 8,7V) (CC)

Power
 Pouissance
 Potencia

4.5 W (single)
9 W (double)


Series wiring (CC)
 Câblage en série
 Cableado en serie



CCT/CRI/Flux

CRI Typ. 98 R9>90

Photometric diagrams




2700K	413 lm
3000K	440 lm
3500K	445 lm
4000K	475 lm
Custom	TBD



Code Construction

Construction du code produit
 Construcción del código de producto

MW X X X X X XX X E

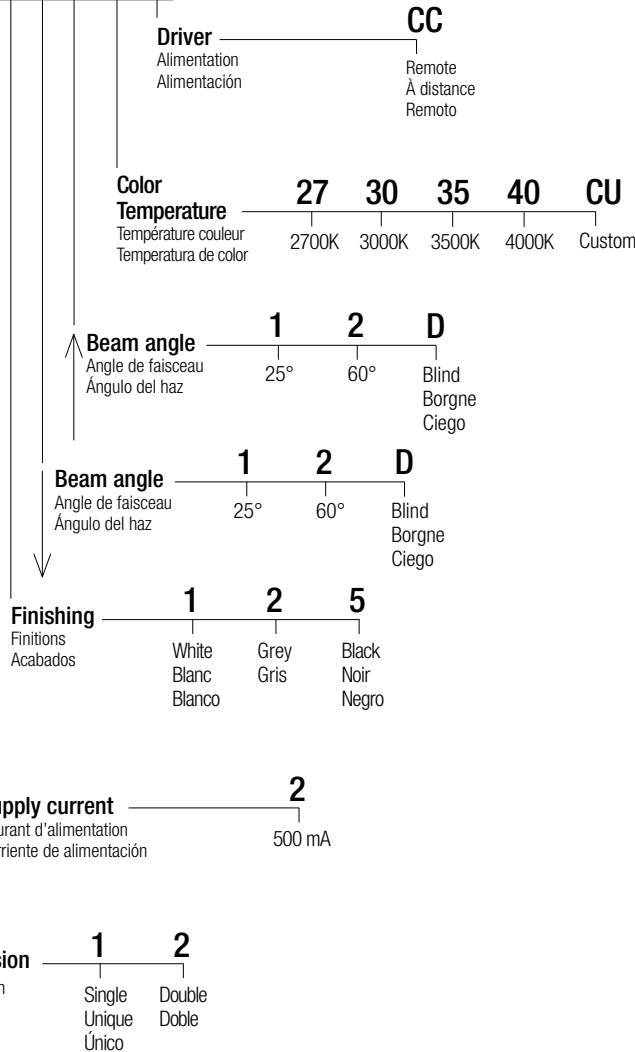

Drivers - Alimentateurs - Alimentadores

