


HULA

design: Lapo Grassellini

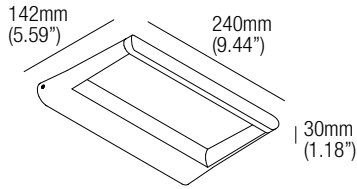

Supply current
 Courant d'alimentation
 Corriente de alimentación
24VDC

Power
 Pouissance
 Potencia
6W



CCT	Flux	CRI
2700K	480 lm	98+
3000K	510 lm	98+
3500K	535 lm	98+
4000K	560 lm	98+



Code Construction

Construction du code produit
 Construcción del código de producto

HL1 | X | XX |


HL1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color
	1	White Blanc Blanco	27	2700K
	2	Grey Gris	30	3000K
	5	Black Noir Negro	35	3500K
			40	4000K
			CU	Custom

Drivers

Alimentateurs
 Alimentadores

Parallel wiring

Câblage en parallèle
 Cableado en paralelo



0-10V

DL010-024-100VD

100W CV 0-10V Dimming
 Dimming Range: 1%
Min. 1/Max. 15 Fixtures per Driver

Phase

DLELD-024-100W

96W Constant Voltage
 Dimming Range: 10%
Min. 1/Max. 15 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.CV.1

Hi-Lume 2-Wire Phase
 40W Constant Voltage
 Dimming Range: 1%
Min. 1/Max. 7 Fixtures per Driver

Lutron Ecosystem

LDE.CV.1

Hi-Lume Ecosystem
 40W Constant Voltage
 Dimming Range: 1%
Min. 1/Max. 7 Fixtures per Driver